



# RESIDENTIAL SLIDING WINDOW (AVAILABLE IN WA ONLY)

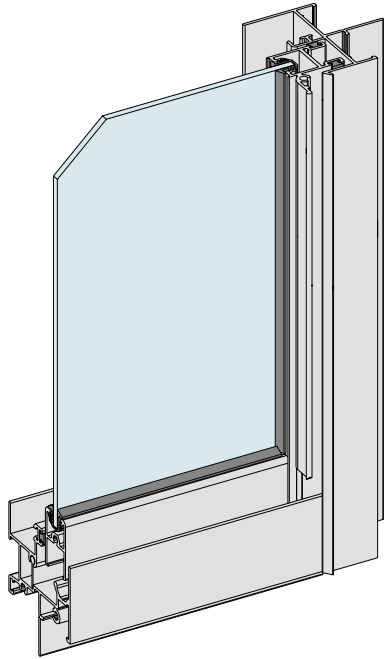


## KEY FEATURES


- Alternative 72mm frame designed specifically for W.A. building-in conditions, or alternative 49mm frame.
- Optional meeting stile and transom strengths cover a large variety of design wind load areas.
- Standard centre lock with key operated aluminium shoot bolt. This lock allows home owners to lock the window in the closed and partly open (ventilation) position.
- Sliding sashes can also be fitted with a variety of jamb latches.
- Opening sashes run on large diameter wheels ensuring smooth operation.
- 90° and 135° Corner couplers that will accept 50mm mild steel roof support columns.
- A variety of slider sill options that allow water resistance up to 450Pa.




Large diameter wheels used on this product ensure smooth operation for years to come – compare our wheels to the others. Double boggy quad rollers used for heavy doors.



Our standard slider sill performs well but for exposed locations we offer a higher water-resisting sump sill, shown above. The sump sill is also fitted with a proprietary anti-blowback ball valve.



We have numerous couplers for all our windows and doors. The illustration above shows sliding window coupled to sliding door.



For ultimate security we offer a central ventlock. As you turn the key, part of the stile projects into a keeper located in the head. It allows sash to be locked in closed or partly-open positions.

### GENERAL

**Max Panel Height\***  
1500mm

**Max Panel Width\***  
1050mm

**Max Glass Thickness**  
6.76mm (10.38 w/adaptor)

**Frame Depth**  
72mm or 49mm

### ENERGY

**UW Range**  
3.2-6.4

**SHGC Range**  
0.30-0.73

### WEATHER

**Maximum Water**  
450 Pa.

### ACOUSTICS

This product has not been acoustics tested. AWS anticipates this products acoustic performance will be inline with Series 504

